



Color Laser Copier Specialty ID Card Media

INSTRUCTIONS FOR USE

Layout: It is not advisable to image within 1/4" (6mm) of the card well or perforated card area. Deletion will vary machine to machine and depend upon the image file.

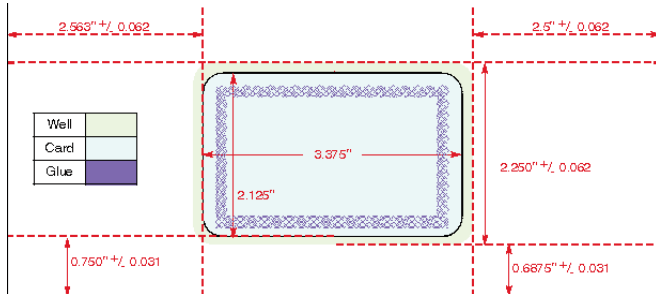


1 up Plasticcard



Handling: In order to properly accept toners, the materials surface must be receptive. It is important to remember:

Handling should be kept to a minimum. To avoid finger prints, handle the material by the edges. Finger marks may cause the toner to reject.

The material's coated surface should be kept out of contact with liquids and materials containing water or oil.



Fanning: Always fan the material before loading the copier. This will place air between the sheets, reduce static and assist feeding.


Printing: Be sure to refer to copier/printer specifications on paper/media weights prior to use. It is recommended that these heavier grade materials are pre-tested on the copier to determine compatibility with the copier at this weight.

Lamicard sheets can be imaged on one or two sides. Lamicards can be auto duplexed.

Plasticcard sheets can be imaged on one side only.

It is recommended that the bypass tray and heavy stock or special paper setting be used on models that have this option. These materials are also suitable for monochrome copiers and laser printers capable of taking the material's thickness.

(fig.A)




Feed: For best results and to minimize the possibility of jams whenever possible, feed the material short edge first. All ID Card sheets are short grain to facilitate feeding and to enable post-processing scoring and trimming. **fig.A**

A unique embossed border allows several hundred sheets to lay flat with no stack bias to accommodate high capacity feeding and productivity.

Loading/stacking volumes may be limited due to sheet structure.

1 up Lamicard

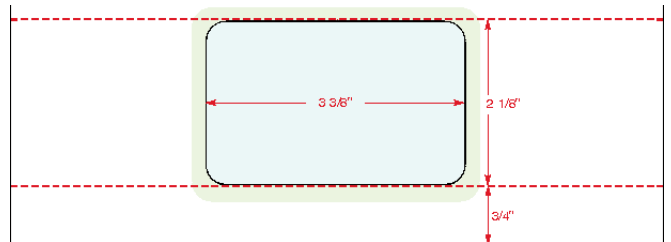

2 up Lamicard

